

Surveying 2

By Dr. Khamis Naba Sayl

المحاضرة الثانية عشر

REMOTE SENSING

REMOTE SENSING

Remote sensing (RS), also called earth observation, refers to obtaining information about objects or areas at the Earth's surface without being in direct contact with the object or area. Humans accomplish this task with aid of eyes or by the sense of smell or hearing; so, remote sensing is day-today business for people. Reading the newspaper, watching cars driving in front of you are all remote sensing activities. Most sensing devices record information about an object by measuring an object's transmission of electromagnetic energy from reflecting and radiating surfaces.

Remote sensing techniques allow taking images of the earth surface in various wavelength region of the electromagnetic spectrum (EMS). One of the major characteristics of a remotely sensed image is the wavelength region it represents in the EMS. Some of the images represent reflected solar radiation in the visible and the near infrared regions of the electromagnetic spectrum, others are the measurements of the energy emitted by the earth surface itself i.e. in the thermal infrared wavelength region. The energy measured in the microwave region is the measure of relative return from the earth's surface, where the energy is transmitted from the vehicle itself. This is known as active remote sensing, since the energy source is provided by the remote sensing platform. Whereas the systems where the remote sensing measurements depend upon the external energy source, such as sun are referred to as passive remote sensing systems.

PRINCIPLES OF REMOTE SENSING

Detection and discrimination of objects or surface features means detecting and recording of radiant energy reflected or emitted by objects or surface material (Fig. 1). Different objects return different amount of energy in different bands of the electromagnetic spectrum, incident upon it. This depends on the property of material (structural, chemical, and physical), surface roughness, angle of incidence, intensity, and wavelength of radiant energy.

The Remote Sensing is basically a multi-disciplinary science which includes a combination of various disciplines such as optics, spectroscopy, photography, computer, electronics and telecommunication, satellite launching etc. All these technologies are integrated to act as one complete system in itself, known as Remote Sensing System. There are a number of stages in a Remote Sensing process, and each of them is important for successful operation.

Stages in Remote Sensing

- Emission of electromagnetic radiation, or EMR (sun/self- emission)
- Transmission of energy from the source to the surface of the earth, as well as absorption and scattering
- Interaction of EMR with the earth's surface: reflection and emission
- Transmission of energy from the surface to the remote sensor
- Sensor data output
- Data transmission, processing and analysis

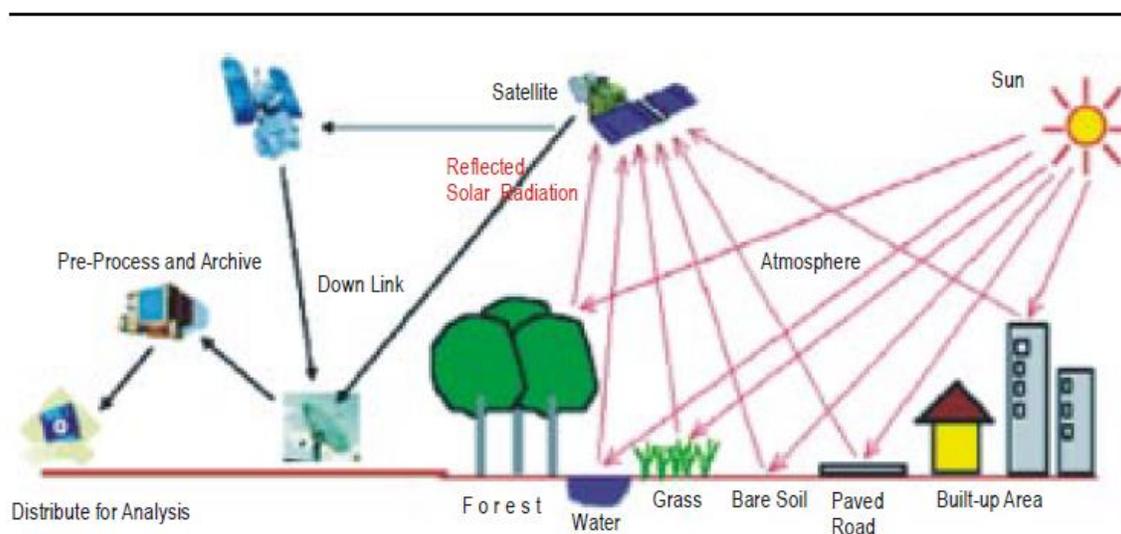


Figure 1: Remote Sensing process

At temperature above absolute zero, all objects radiate electromagnetic energy by virtue of their atomic and molecular oscillations. The total amount of emitted radiation increases with the body's absolute temperature and peaks at progressively shorter wavelengths. The sun, being a major source of energy, radiation and illumination, allows capturing reflected light with conventional (and some not-so-conventional) cameras and films.

The basic strategy for sensing electromagnetic radiation is clear. Everything in nature has its own unique distribution of reflected, emitted and absorbed radiation. These spectral characteristics, if ingeniously exploited, can be used to distinguish one thing from another or to obtain information about shape, size and other physical and chemical properties.

Modern Remote Sensing Technology versus Conventional Aerial Photography

The use of different and extended portions of the electromagnetic spectrum, development in sensor technology, different platforms for remote sensing (spacecraft, in addition to aircraft), emphasize on the use of spectral information as compared to spatial information, advancement in image processing and enhancement techniques, and automated image analysis in addition to manual interpretation are points for comparison of conventional aerial photography with modern remote sensing system.

During early half of twentieth century, aerial photos were used in military surveys and topographical mapping. Main advantage of aerial photos has been the high spatial resolution with fine details and therefore they are still used for mapping at large scale such as in route surveys, town planning, construction project surveying, cadastral mapping etc. Modern remote sensing system provide satellite images suitable for medium scale mapping used in natural resources surveys and monitoring such as forestry, geology, watershed management etc. However the future generation satellites are going to provide much high-resolution images for more versatile applications.

ELECTROMAGNETIC RADIATION AND THE ELECTROMAGNETIC SPECTRUM

EMR is a dynamic form of energy that propagates as wave motion at a velocity of $c = 3 \times 10^{10}$ cm/sec. The parameters that characterize a wave motion are wavelength (λ), frequency (ν) and velocity (c) (Fig. 2). The relationship between the above is

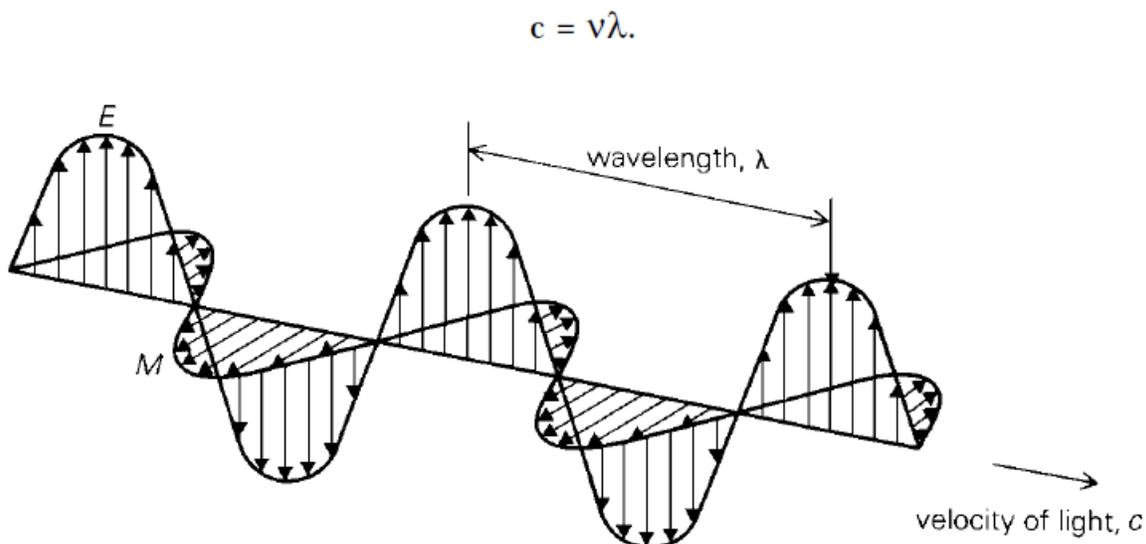


Figure 2: Electromagnetic wave. It has two components, Electric field E and Magnetic field M, both perpendicular to the direction of propagation

Electromagnetic energy radiates in accordance with the basic wave theory. This theory describes the EM energy as travelling in a harmonic sinusoidal fashion at the velocity of light. Although many characteristics of EM energy are easily described by wave theory, another theory known as particle theory offers insight into how electromagnetic energy interacts with matter. It suggests that EMR is composed of many discrete units called photons/quanta. The energy of photon is

$$Q = hc / \lambda = h \nu$$

Where

Q is the energy of quantum,

h = Planck's constant

Table 2: Principal Divisions of the Electromagnetic Spectrum

Wavelength	Description
Gamma rays	Gamma rays
X-rays	X-rays
Ultraviolet (UV) region 0.30 μm - 0.38 μm (1 μm = 10 ⁻⁶ m)	This region is beyond the violet portion of the visible wavelength, and hence its name. Some earth's surface material primarily rocks and minerals emit visible UV radiation. However UV radiation is largely scattered by earth's atmosphere and hence not used in field of remote sensing.
Visible Spectrum 0.4 μm - 0.7 μm Violet 0.4 μm -0.446 μm Blue 0.446 μm -0.5 μm Green 0.5 μm - 0.578 μm Yellow 0.578 μm - 0.592 μm Orange 0.592 μm - 0.62 μm Red 0.62 μm -0.7 μm	This is the light, which our eyes can detect. This is the only portion of the spectrum that can be associated with the concept of color. Blue Green and Red are the three primary colors of the visible spectrum. They are defined as such because no single primary color can be created from the other two, but all other colors can be formed by combining the three in various proportions. The color of an object is defined by the color of the light it reflects.
Infrared (IR) Spectrum 0.7 μm – 100 μm	Wavelengths longer than the red portion of the visible spectrum are designated as the infrared spectrum. British Astronomer William Herschel discovered this in 1800. The infrared region can be divided into two categories based on their radiation properties. Reflected IR (7 μm - 3.0 μm) is used for remote sensing. Thermal IR (3 μm - 35 μm) is the radiation emitted from earth's surface in the form of heat and used for remote sensing.
Microwave Region 1 mm - 1 m	This is the longest wavelength used in remote sensing. The shortest wavelengths in this range have properties similar to thermal infrared region. The main advantage of this spectrum is its ability to penetrate through clouds.
Radio Waves (>1 m)	This is the longest portion of the spectrum mostly used for commercial broadcast and meteorology.

Types of Remote Sensing

Remote sensing can be either passive or active. ACTIVE systems have their own source of energy (such as RADAR) whereas the PASSIVE systems depend upon external source of illumination (such as SUN) or self-emission for remote sensing.

INTERACTION OF EMR WITH THE EARTH'S SURFACE

Radiation from the sun, when incident upon the earth's surface, is either reflected by the surface, transmitted into the surface or absorbed and emitted by the surface (Fig. 3). The EMR, on interaction, experiences a number of changes in magnitude, direction, wavelength, polarization and phase. These changes are detected by the remote sensor and enable the interpreter to obtain useful information about the object of interest. The remotely sensed data contain both spatial information (size, shape and orientation) and spectral information (tone, colour and spectral signature).

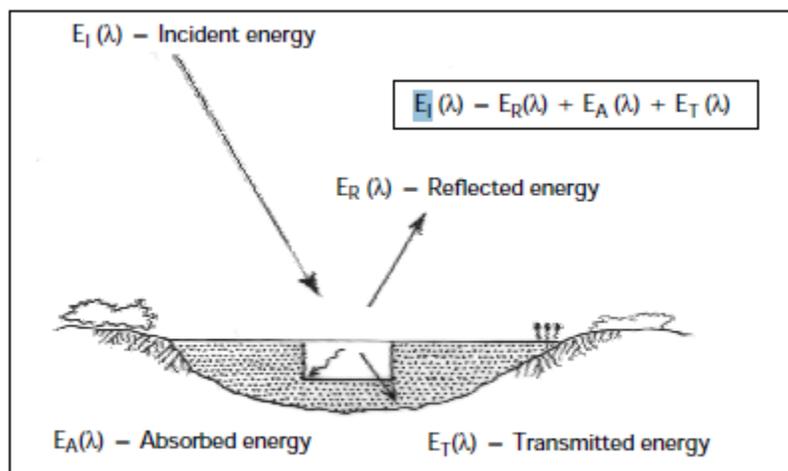


Figure 3: Interaction of Energy with the earth's surface. (source: Lillesand & Kiefer, 1993)

From the viewpoint of interaction mechanisms, with the object-visible and infrared wavelengths from $0.3 \mu\text{m}$ to $16 \mu\text{m}$ can be divided into three regions. The spectral band from $0.3 \mu\text{m}$ to $3 \mu\text{m}$ is known as the reflective region. In this band, the radiation sensed by the sensor is that due to the sun, reflected by the earth's surface. The band corresponding to the atmospheric window between $8 \mu\text{m}$ and $14 \mu\text{m}$ is

known as the thermal infrared band. The energy available in this band for remotesensing is due to thermal emission from the earth's surface. Both reflection and self-emission are important in the intermediate band from 3 μm to 5.5 μm . In the microwave region of the spectrum, the sensor is radar, which is an active sensor, as it provides its own source of EMR. The EMR produced by the radar is transmitted to the earth's surface and the EMR reflected (back scattered) from the surface is recorded and analyzed. The microwave region can also be monitored with passive sensors, called microwave radiometers, which record the radiation emitted by the terrain in the microwave region.

Reflection

Of all the interactions in the reflective region, surface reflections are the most useful and revealing in remote sensing applications. Reflection occurs when a ray of light is redirected as it strikes a non-transparent surface. The reflection intensity depends on the surface refractive index, absorption coefficient and the angles of incidence and reflection (Fig. 4).

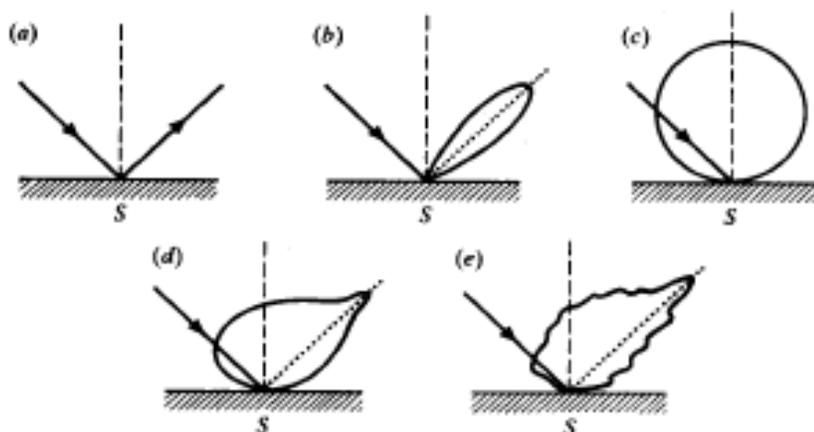


Figure 4. Different types of scattering surfaces (a) Perfect specular reflector (b) Near perfect specular reflector (c) Lambertian (d) Quasi-Lambertian (e) Complex.

Transmission

Transmission of radiation occurs when radiation passes through a substance without significant attenuation. For a given thickness, or depth of a substance, the ability of a medium to transmit energy is measured as transmittance (τ).

$$\tau = \frac{\text{Transmitted radiation}}{\text{Incident radiation}}$$

Spectral Signature

Spectral reflectance, $[\rho(\lambda)]$, is the ratio of reflected energy to incident energy as a function of wavelength. Various materials of the earth's surface have different spectral reflectance characteristics. Spectral reflectance is responsible for the color or tone in a photographic image of an object. Trees appear green because they reflect more of the green wavelength. The values of the spectral reflectance of objects averaged over different, well-defined wavelength intervals comprise the spectral signature of the objects or features by which they can be distinguished. To obtain the necessary ground truth for the interpretation of multispectral imagery, the spectral characteristics of various natural objects have been extensively measured and recorded. The spectral reflectance is dependent on wavelength, it has different values at different wavelengths for a given terrain feature. The reflectance characteristics of the earth's surface features are expressed by spectral reflectance, which is given by:

$$\rho(\lambda) = [\text{ER}(\lambda) / \text{EI}(\lambda)] \times 100$$

$\rho(\lambda)$ = Spectral reflectance (reflectivity) at a particular wavelength.

$\text{ER}(\lambda)$ = Energy of wavelength reflected from object

$\text{EI}(\lambda)$ = Energy of wavelength incident upon the object

The plot between $\rho(\lambda)$ and λ is called a spectral reflectance curve. This varies with the variation in the chemical composition and physical conditions of the feature, which results in a range of values. The spectral response patterns are averaged to get a generalized form, which is called generalized spectral response pattern for the object concerned. Spectral signature is a term used for unique spectral response pattern, which is characteristic of a terrain feature. Figure 5 shows a typical reflectance curves for three basic types of earth surface features, healthy vegetation, dry bare soil (grey-brown and loamy) and clear lake water.

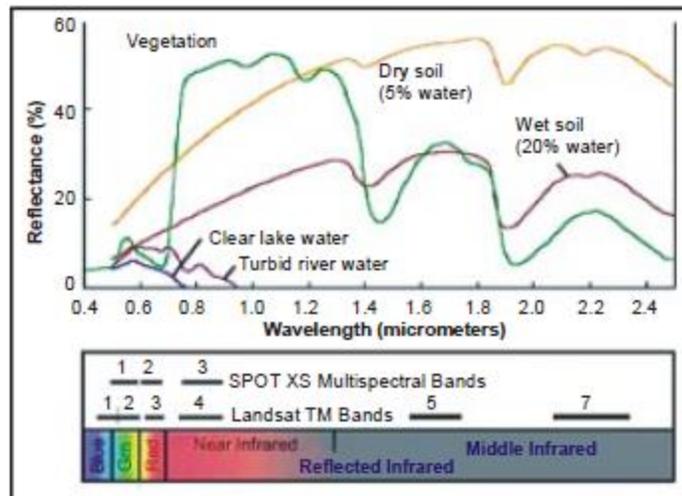


Figure 5. Typical Spectral Reflectance curves for vegetation, soil and water

Reflectance Characteristics of Earth's Cover types

The spectral characteristics of the three main earth surface features are discussed below :

Vegetation: The spectral characteristics of vegetation vary with wavelength. Plant pigment in leaves called chlorophyll strongly absorbs radiation in the red and blue wavelengths but reflects green wavelength. The internal structure of healthy leaves acts as diffuse reflector of near infrared wavelengths. Measuring and monitoring the near infrared reflectance is one way that scientists determine how healthy particular vegetation may be.

Water: Majority of the radiation incident upon water is not reflected but is either absorbed or transmitted. Longer visible wavelengths and near infrared radiation is absorbed more by water than by the visible wavelengths. Thus water looks blue or blue green due to stronger reflectance at these shorter wavelengths and darker if viewed at red or near infrared wavelengths. The factors that affect the variability in reflectance of a water body are depth of water, materials within water and surface roughness of water.

Soil: The majority of radiation incident on a soil surface is either reflected or absorbed and little is transmitted. The characteristics of soil that determine its reflectance properties are its moisture content, organic matter content, texture, structure and iron oxide content. The soil curve shows less peak and valley variations. The presence of moisture in soil decreases its reflectance.

By measuring the energy that is reflected by targets on earth's surface over a variety of different wavelengths, we can build up a spectral signature for that object. And by comparing the response pattern of different features we may be able to distinguish between them, which we may not be able to do if we only compare them at one wavelength. For example, Water and Vegetation reflect somewhat similarly in the visible wavelength but not in the infrared.

INTERACTIONS WITH THE ATMOSPHERE

The sun is the source of radiation, and electromagnetic radiation (EMR) from the sun that is reflected by the earth and detected by the satellite or aircraft-borne sensor must pass through the atmosphere twice, once on its journey from the sun to the earth and second after being reflected by the surface of the earth back to the sensor. Interactions of the direct solar radiation and reflected radiation from the target with the atmospheric constituents interfere with the process of remote sensing and are called as "Atmospheric Effects".

The interaction of EMR with the atmosphere is important to remote sensing for two main reasons. First, information carried by EMR reflected/ emitted by the earth's surface is modified while traversing through the atmosphere. Second, the interaction of EMR with the atmosphere can be used to obtain useful information about the atmosphere itself.

The atmospheric constituents scatter and absorb the radiation modulating the radiation reflected from the target by attenuating it, changing its spatial distribution and introducing into field of view radiation from sunlight scattered in the atmosphere and some of the energy reflected from nearby ground area. Both scattering and absorption vary in their effect from one part of the spectrum to the other.

The solar energy is subjected to modification by several physical processes as it passes the atmosphere, viz.

- 1) Scattering; 2) Absorption, and 3) Refraction

Atmospheric Scattering

Scattering is the redirection of EMR by particles suspended in the atmosphere or by large molecules of atmospheric gases. Scattering not only reduces the image contrast but also changes the spectral signature of ground objects as seen by the

sensor. The amount of scattering depends upon the size of the particles, their abundance, the wavelength of radiation, depth of the atmosphere through which the energy is traveling and the concentration of the particles. The concentration of particulate matter varies both in time and over season. Thus the effects of scattering will be uneven spatially and will vary from time to time. Theoretically scattering can be divided into three categories depending upon the wavelength of radiation being scattered and the size of the particles causing the scattering. The three different types of scattering from particles of different sizes are summarized below:

Scattering process	Wavelength	Approximate dependence particle size	Kinds of particles
Selective			
• Rayleigh	λ^{-4}	< 1 μm	Air molecules
• Mie	λ^0 to λ^{-4}	0.1 to 10 μm	Smoke, haze
• Non-selective	λ^0	> 10 μm	Dust, fog, clouds

Rayleigh Scattering

Rayleigh scattering predominates where electromagnetic radiation interacts with particles that are smaller than the wavelength of the incoming light. The effect of the Rayleigh scattering is inversely proportional to the fourth power of the wavelength. Shorter wavelengths are scattered more than longer wavelengths. In the absence of these particles and scattering the sky would appear black. In the context of remote sensing, the Rayleigh scattering is the most important type of scattering. It causes a distortion of spectral characteristics of the reflected light when compared to measurements taken on the ground.

Mie Scattering

Mie scattering occurs when the wavelength of the incoming radiation is similar in size to the atmospheric particles. These are caused by aerosols: a mixture of gases, water vapor and dust. It is generally restricted to the lower atmosphere where the larger particles are abundant and dominates under overcast cloud conditions. It influences the entire spectral region from ultra violet to near infrared regions.

Non-selective Scattering

This type of scattering occurs when the particle size is much larger than the wavelength of the incoming radiation. Particles responsible for this effect are water

droplets and larger dust particles. The scattering is independent of the wavelength, all the wavelengths are scattered equally. The most common example of non-selective scattering is the appearance of clouds as white. As clouds consist of water droplet particles and the wavelengths are scattered in equal amount, the cloud appears as white. Occurrence of this scattering mechanism gives a clue to the existence of large particulate matter in the atmosphere above the scene of interest which itself is a useful data. Using minus blue filters can eliminate the effects of the Rayleigh component of scattering. However, the effect of heavy haze i.e. when all the wavelengths are scattered uniformly, cannot be eliminated using haze filters. The effects of haze are less pronounced in the thermal infrared region. Microwave radiation is completely immune to haze and can even penetrate clouds.

Atmospheric Absorption

The gas molecules present in the atmosphere strongly absorb the EMR passing through the atmosphere in certain spectral bands. Mainly three gases are responsible for most of absorption of solar radiation, viz. ozone, carbon dioxide and water vapour. Ozone absorbs the high energy, short wavelength portions of the ultraviolet spectrum ($\lambda < 0.24 \mu\text{m}$) thereby preventing the transmission of this radiation to the lower atmosphere. Carbon dioxide is important in remote sensing as it effectively absorbs the radiation in mid and far infrared regions of the spectrum. It strongly absorbs in the region from about 13-17.5 μm , whereas two most important regions of water vapour absorption are in bands 5.5 - 7.0 μm and above 27 μm . Absorption relatively reduces the amount of light that reaches our eye making the scene look relatively duller.

Atmospheric Windows

The general atmospheric transmittance across the whole spectrum of wavelengths is shown in Figure 6. The atmosphere selectively transmits energy of certain wavelengths. The spectral bands for which the atmosphere is relatively transparent are known as atmospheric windows. Atmospheric windows are present in the visible part (.4 μm - .76 μm) and the infrared regions of the EM spectrum. In the visible part transmission is mainly effected by ozone absorption and by molecular scattering. The atmosphere is transparent again beyond about $\lambda = 1\text{mm}$, the region used for microwave remote sensing

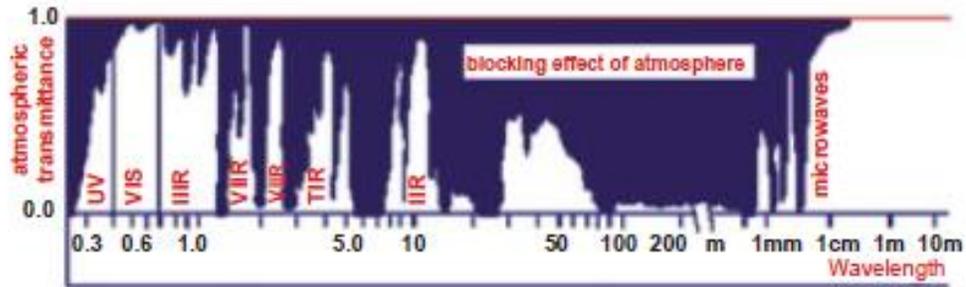


Figure 6 : Atmospheric windows

Refraction

The phenomenon of refraction, that is bending of light at the contact between two media, also occurs in the atmosphere as the light passes through the atmospheric layers of varied clarity, humidity and temperature. These variations influence the density of atmospheric layers, which in turn, causes the bending of light rays as they pass from one layer to another. The most common phenomena are the mirage like apparitions sometimes visible in the distance on hot summer days.