



Lecture 11

JavaScript: Arrays

Instructor: Sudad H. Abed
Designed By: Dabin Ding
UCM

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

1



OBJECTIVES

In this chapter you'll:

- Declare arrays, initialize arrays and refer to individual elements of arrays.
- Store lists and tables of values in arrays.
- Pass arrays to functions.
- Search and sort arrays.
- Declare and manipulate multidimensional arrays.

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

2



- 10.1** Introduction
- 10.2** Arrays
- 10.3** Declaring and Allocating Arrays
- 10.4** Examples Using Arrays
 - 10.4.1 Creating, Initializing and Growing Arrays
 - 10.4.2 Initializing Arrays with Initializer Lists
 - 10.4.3 Summing the Elements of an Array with `for` and `for...in`
 - 10.4.4 Using the Elements of an Array as Counters
- 10.5** Random Image Generator Using Arrays
- 10.6** References and Reference Parameters
- 10.7** Passing Arrays to Functions
- 10.8** Sorting Arrays with Array Method `sort`
- 10.9** Searching Arrays with Array Method `indexOf`
- 10.10** Multidimensional Arrays



10.1 Introduction

- ▶ Arrays
 - Data structures consisting of related data items
- ▶ JavaScript arrays
 - “dynamic” entities that can change size after they are created



10.2 Arrays

- ▶ An array is a group of memory locations
 - All have the same name and normally are of the same type (although this attribute is not required in JavaScript)
- ▶ Each individual location is called an element
- ▶ We may refer to any one of these elements by giving the array's name followed by the position number of the element in square brackets ([])

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

5



10.2 Arrays (Cont.)

- ▶ The first element in every array is the zeroth element.
- ▶ The i th element of array c is referred to as $c[i-1]$.
- ▶ Array names follow the same conventions as other identifiers
- ▶ A subscripted array name
 - can be used on the left side of an assignment to place a new value into an array element
 - can be used on the right side of an assignment operation to use its value
- ▶ Every array in JavaScript knows its own length, which it stores in its `length` attribute and can be found with the expression `arrayname.length`

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

6

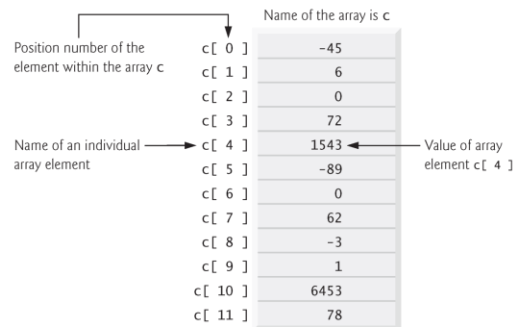


Fig. 10.1 | Array with 12 elements.



©1992-2012 by Pearson Education, Inc. All Rights Reserved.



Operators	Associativity	Type
() [] .	left to right	highest
++ -- !	right to left	unary
* / %	left to right	multiplicative
+ -	left to right	additive
< <= > >=	left to right	relational
== !=	left to right	equality
&&	left to right	logical AND
	left to right	logical OR
?:	right to left	conditional
= += -= *= /= %=	right to left	assignment

Fig. 10.2 | Precedence and associativity of the operators discussed so far.



©1992-2012 by Pearson Education, Inc. All Rights Reserved.

10.3 Declaring and Allocating Arrays



- ▶ JavaScript arrays are **Array objects**.
- ▶ You use the **new operator** to create an array and to specify the number of elements in an array.
- ▶ The new operator creates an object as the script executes by obtaining enough memory to store an object of the type specified to the right of new .

10.4 Examples Using Arrays



- ▶ Zero-based counting is usually used to iterate through arrays
- ▶ JavaScript reallocates an Array when a value is assigned to an element that is outside the bounds of the original Array



Software Engineering Observation 10.1

It's considered good practice to separate your JavaScript scripts into separate files so that they can be reused in multiple web pages.



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.3: InitArray.html -->
4 <!-- Web page for showing the results of initializing arrays. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Initializing an Array</title>
9     <link rel = "stylesheet" type = "text/css" href = "tablestyle.css">
10    <script src = "InitArray.js"></script>
11  </head>
12  <body>
13    <div id = "output1"></div>
14    <div id = "output2"></div>
15  </body>
16 </html>
```

Fig. 10.3 | Web page for showing the results of initializing arrays.
(Part 1 of 2.)





Initializing an Array

file:///C:/

Array n1:

Index	Value
0	0
1	1
2	2
3	3
4	4

Array n2:

Index	Value
0	0
1	1
2	2
3	3
4	4

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

13



```
1 // Fig. 10.4: InitArray.js
2 // Create two arrays, initialize their elements and display them
3 function start()
4 {
5     var n1 = new Array( 5 ); // allocate five-element array
6     var n2 = new Array(); // allocate empty array
7
8     // assign values to each element of array n1
9     var length = n1.length; // get array's length once before the loop
10
11     for ( var i = 0; i < length; ++i )
12     {
13         n1[ i ] = i;
14     } // end for
15
16     // create and initialize five elements in array n2
17     for ( i = 0; i < 5; ++i )
18     {
19         n2[ i ] = i;
20     } // end for
21
22     outputArray( "Array n1:", n1, document.getElementById( "output1" ) );
23     outputArray( "Array n2:", n2, document.getElementById( "output2" ) );
24 } // end function start
```

Fig. 10.4 | Create two arrays, initialize their elements and display them. (Part I of 2.)

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

14



```
25
26 // output the heading followed by a two-column table
27 // containing indices and elements of "theArray"
28 function outputArray( heading, theArray, output )
29 {
30     var content = "<h2>" + heading + "</h2><table>" +
31                 "<thead><th>Index</th><th>Value</th></thead><tbody>";
32
33     // output the index and value of each array element
34     var length = theArray.length; // get array's length once before loop
35
36     for ( var i = 0; i < length; ++i )
37     {
38         content += "<tr><td>" + i + "</td><td>" + theArray[ i ] +
39                 "</td></tr>";
40     } // end for
41
42     content += "</tbody></table>";
43     output.innerHTML = content; // place the table in the output element
44 } // end function outputArray
45
46 window.addEventListener( "load", start, false );
```

Fig. 10.4 | Create two arrays, initialize their elements and display them. (Part 2 of 2.)



Software Engineering Observation 10.2

JavaScript automatically reallocates an array when a value is assigned to an element that's outside the bounds of the array. Elements between the last element of the original array and the new element are undefined.



Error-Prevention Tip 10.1

When accessing array elements, the index values should never go below 0 and should be less than the number of elements in the array (i.e., one less than the array's size), unless it's your explicit intent to grow the array by assigning a value to a nonexistent element.

10.4 Examples Using Arrays (Cont.)



Using an Initializer List

- ▶ Arrays can be created using a comma-separated **initializer list** enclosed in square brackets ([])
 - The array's size is determined by the number of values in the initializer list
- ▶ The initial values of an array can be specified as arguments in the parentheses following `new Array`
 - The size of the array is determined by the number of values in parentheses

10.4.2 Initializing Arrays with Initializer Lists



- ▶ The example in Figs. 10.5–10.6 creates three Array objects to demonstrate initializing arrays with initializer lists.
- ▶ Figure 10.5 is nearly identical to Fig. 10.3 but provides three divs in its body element for displaying this example's arrays.



©1992-2012 by Pearson Education, Inc. All Rights Reserved.

19



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.5: InitArray2.html -->
4 <!-- Web page for showing the results of initializing arrays. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Initializing an Array</title>
9     <link rel = "stylesheet" type = "text/css" href = "tablestyle.css">
10    <script src = "InitArray2.js"></script>
11  </head>
12  <body>
13    <div id = "output1"></div>
14    <div id = "output2"></div>
15    <div id = "output3"></div>
16  </body>
17 </html>
```

Fig. 10.5 | Web page for showing the results of initializing arrays.
(Part 1 of 2.)



©1992-2012 by Pearson Education, Inc. All Rights Reserved.

20



Initializing an Array

file:///C:/

Array colors contains

Index	Value
0	cyan
1	magenta
2	yellow
3	black

Array integers1 contains

Index	Value
0	2
1	4
2	6
3	8

Array integers2 contains

Index	Value
0	2
1	undefined
2	undefined
3	8

Fig. 10.5 | Web page for showing the results of initializing arrays.

(Part 2 of 2)



```
1 // Fig. 10.6: InitArray2.js
2 // Initializing arrays with initializer lists.
3 function start()
4 {
5     // Initializer list specifies the number of elements and
6     // a value for each element.
7     var colors = new Array( "cyan", "magenta", "yellow", "black" );
8     var integers1 = [ 2, 4, 6, 8 ];
9     var integers2 = [ 2, , , 8 ];
10
11     outputArray( "Array colors contains", colors,
12                 document.getElementById( "output1" ) );
13     outputArray( "Array integers1 contains", integers1,
14                 document.getElementById( "output2" ) );
15     outputArray( "Array integers2 contains", integers2,
16                 document.getElementById( "output3" ) );
17 } // end function start
18
```

Fig. 10.6 | Initializing arrays with initializer lists. (Part 1 of 2.)



```
19 // output the heading followed by a two-column table
20 // containing indices and elements of "theArray"
21 function outputArray( heading, theArray, output )
22 {
23     var content = "<h2>" + heading + "</h2><table>" +
24         "<thead><th>Index</th><th>Value</th></thead><tbody>";
25
26     // output the index and value of each array element
27     var length = theArray.length; // get array's length once before loop
28
29     for ( var i = 0; i < length; ++i )
30     {
31         content += "<tr><td>" + i + "</td><td>" + theArray[ i ] +
32             "</td></tr>";
33     } // end for
34
35     content += "</tbody></table>";
36     output.innerHTML = content; // place the table in the output element
37 } // end function outputArray
38
39 window.addEventListener( "load", start, false );
```

Fig. 10.6 | Initializing arrays with initializer lists. (Part 2 of 2.)

10.4.3 Summing the Elements of an Array with for and for...in

- ▶ The example in Figs. 10.7–10.8 sums an array's elements and displays the results.
- ▶ The document in Fig. 10.7 shows the results of the script in Fig. 10.8.
- ▶ JavaScript's for...in Repetition Statement
 - Enables a script to perform a task for each element in an array



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.7: SumArray.html -->
4 <!-- HTML5 document that displays the sum of an array's elements. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Sum Array Elements</title>
9     <script src = "SumArray.js"></script>
10  </head>
11  <body>
12    <div id = "output"></div>
13  </body>
14 </html>
```

Fig. 10.7 | HTML5 document that displays the sum of an array's elements.



```
1 // Fig. 10.8: SumArray.js
2 // Summing the elements of an array with for and for...in
3 function start()
4 {
5   var theArray = [ 1, 2, 3, 4, 5, 6, 7, 8, 9, 10 ];
6   var total1 = 0, total2 = 0;
7
8   // iterates through the elements of the array in order and adds
9   // each element's value to total1
10  var length = theArray.length; // get array's length once before loop
11
12  for ( var i = 0; i < length; ++i )
13  {
14    total1 += theArray[ i ];
15  } // end for
16
17  var results = "<p>Total using indices: " + total1 + "</p>";
18
```

Fig. 10.8 | Summing the elements of an array with for and for...in.
(Part I of 2.)





Error-Prevention Tip 10.2

When iterating over all the elements of an array, use a `for...in` statement to ensure that you manipulate only the existing elements. The `for...in` statement skips any undefined elements in the array.



```
19 // iterates through the elements of the array using a for... in
20 // statement to add each element's value to total2
21 for ( var element in theArray )
22 {
23     total2 += theArray[ element ];
24 } // end for
25
26 results += "<p>Total using for...in: " + total2 + "</p>";
27 document.getElementById( "output" ).innerHTML = results;
28 } // end function start
29
30 window.addEventListener( "load", start, false );
```


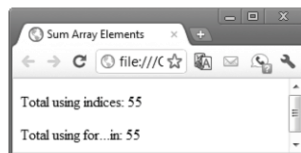


Fig. 10.8 | Summing the elements of an array with `for` and `for...in`.
(Part 2 of 2.)

10.4.4 Using the Elements of an Array as Counters



- ▶ An array version of this example
- ▶ We divided the example into three files
 - style.css contains the styles (not shown here),
 - RollDice.html (Fig. 10.9) contains the HTML5 document and
 - RollDice.js (Fig. 10.10) contains the JavaScript.

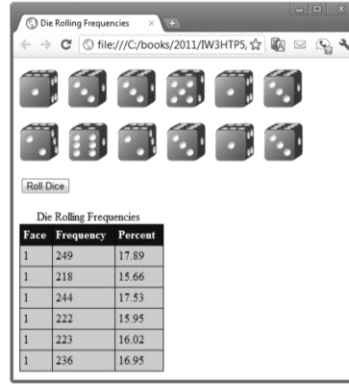

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

29



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.9: RollDice.html -->
4 <!-- HTML5 document for the dice-rolling example. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Roll a Six-Sided Die 6000000 Times</title>
9     <link rel = "stylesheet" type = "text/css" href = "style.css">
10    <script src = "RollDice.js"></script>
11  </head>
12  <body>
13    <p><img id = "die1" src = "blank.png" alt = "die 1 image">
14      <img id = "die2" src = "blank.png" alt = "die 2 image">
15      <img id = "die3" src = "blank.png" alt = "die 3 image">
16      <img id = "die4" src = "blank.png" alt = "die 4 image">
17      <img id = "die5" src = "blank.png" alt = "die 5 image">
18      <img id = "die6" src = "blank.png" alt = "die 6 image"></p>
```

Fig. 10.9 | HTML5 document for the dice-rolling example. (Part I of 3.)

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

30



```
19 <p><img id = "die7" src = "blank.png" alt = "die 7 image">
20 <img id = "die8" src = "blank.png" alt = "die 8 image">
21 <img id = "die9" src = "blank.png" alt = "die 9 image">
22 <img id = "die10" src = "blank.png" alt = "die 10 image">
23 <img id = "die11" src = "blank.png" alt = "die 11 image">
24 <img id = "die12" src = "blank.png" alt = "die 12 image"></p>
25 <form action = "#">
26 <input id = "rollButton" type = "button" value = "Roll Dice">
27 </form>
28 <div id = "frequencyTableDiv"></div>
29 </body>
30 </html>
```

Fig. 10.9 | HTML5 document for the dice-rolling example. (Part 2 of 3.)

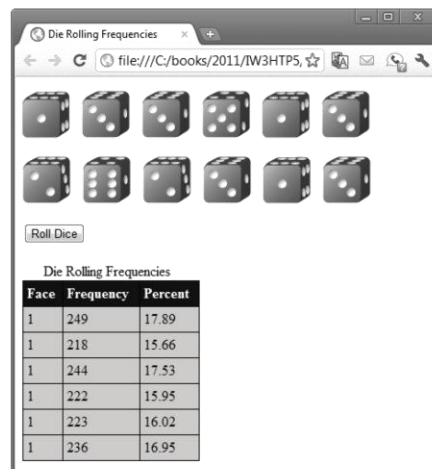


Fig. 10.9 | HTML5 document for the dice-rolling example. (Part 3 of 3.)





```
1 // Fig. 10.10: RollDice.js
2 // Summarizing die-rolling frequencies with an array instead of a switch
3 var frequency = [ , 0, 0, 0, 0, 0, 0 ]; // frequency[0] uninitialized
4 var totalDice = 0;
5 var dieImages = new Array(12); // array to store img elements
6
7 // get die img elements
8 function start()
9 {
10     var button = document.getElementById( "rollButton" );
11     button.addEventListener( "click", rollDice, false );
12     var length = dieImages.length; // get array's length once before loop
13
14     for ( var i = 0; i < length; ++i )
15     {
16         dieImages[ i ] = document.getElementById( "die" + ( i + 1 ) );
17     } // end for
18 } // end function start
19
```

Fig. 10.10 | Summarizing die-rolling frequencies with an array instead of a switch. (Part 1 of 5.)



```
20 // roll the dice
21 function rollDice()
22 {
23     var face; // face rolled
24     var length = dieImages.length;
25
26     for ( var i = 0; i < length; ++i )
27     {
28         face = Math.floor( 1 + Math.random() * 6 );
29         tallyRolls( face ); // increment a frequency counter
30         setImage( i, face ); // display appropriate die image
31         ++totalDice; // increment total
32     } // end for
33
34     updateFrequencyTable();
35 } // end function rollDice
36
37 // increment appropriate frequency counter
38 function tallyRolls( face )
39 {
40     ++frequency[ face ]; // increment appropriate count
41 } // end function tallyRolls
42
```

Fig. 10.10 | Summarizing die-rolling frequencies with an array instead of a switch. (Part 2 of 5.)



```
43 // set image source for a die
44 function setImage( dieImg )
45 {
46     dieImages[ dieNumber ].setAttribute( "src", "die" + face + ".png" );
47     dieImages[ dieNumber ].setAttribute( "alt",
48         "die with " + face + " spot(s)" );
49 } // end function setImage
50
```

Fig. 10.10 | Summarizing die-rolling frequencies with an array instead of a switch. (Part 3 of 5.)



```
51 // update frequency table in the page
52 function updateFrequencyTable()
53 {
54     var results = "<table><caption>Die Rolling Frequencies</caption>" +
55         "<thead><th>Face</th><th>Frequency</th>" +
56         "<th>Percent</th></thead><tbody>";
57     var length = frequency.length;
58     // create table rows for frequencies
59     for ( var i = 1; i < length; ++i )
60     {
61         results += "<tr><td>1</td><td>" + i + "</td><td>" +
62             formatPercent(frequency[ i ] / totalDice) + "</td></tr>";
63     } // end for
64     results += "</tbody></table>";
65     document.getElementById( "frequencyTableDiv" ).innerHTML = results;
66 } // end function updateFrequencyTable
67
68
```

Fig. 10.10 | Summarizing die-rolling frequencies with an array instead of a switch. (Part 4 of 5.)





```
70 // format percentage
71 function formatPercent( value )
72 {
73     value *= 100;
74     return value.toFixed(2);
75 } // end function formatPercent
76
77 window.addEventListener( "load", start, false );
```

Fig. 10.10 | Summarizing die-rolling frequencies with an array instead of a switch. (Part 5 of 5.)



Correction for setImage function:

```
// set image source for a die
function setImage( dieNumber, face )
{
    dieImages[ dieNumber ].setAttribute( "src", "die" + face + ".png" );
    dieImages[ dieNumber ].setAttribute( "alt",
        "die with " + face + " spot(s)" );
} // end function setImage
```



10.5 Random Image Generator Using Arrays



- ▶ In Chapter 9, the random image generator required image files to be named with the word `die` followed by a number from 1 to 6 and the file extension `.png` (e.g, `die1.png`).
- ▶ The example in Figs. 10.11–10.12 does not require the image filenames to contain integers in sequence.



©1992-2012 by Pearson Education, Inc. All Rights Reserved.

39

10.5 Random Image Generator Using Arrays



- ▶ It uses an array `pictures` to store the names of the image files as strings.
 - Each time you click the image in the document, the script generates a random integer and uses it as an index into the `pictures` array.
 - The script updates the `img` element's `src` attribute with the image filename at the randomly selected position in the `pictures` array.
 - We update the `alt` attribute with an appropriate description of the image from the `descriptions` array.



©1992-2012 by Pearson Education, Inc. All Rights Reserved.

40



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.11: RandomPicture.html -->
4 <!-- HTML5 document that displays randomly selected images. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Random Image Generator</title>
9     <script src = "RandomPicture.js"></script>
10  </head>
11  <body>
12    <img id = "image" src = "CPE.png" alt = "Common Programming Error">
13  </body>
14 </html>
```

Fig. 10.11 | HTML5 document that displays randomly selected images. (Part 1 of 2.)



Fig. 10.11 | HTML5 document that displays randomly selected images. (Part 2 of 2.)





```
15 // Fig. 10.12: RandomPicture2.js
16 // Random image selection using arrays
17 var iconImg;
18 var pictures = [ "CPE", "EPT", "GPP", "GUI", "PERF", "PORT", "SEO" ];
19 var descriptions = [ "Common Programming Error",
20 "Error-Prevention Tip", "Good Programming Practice",
21 "Look-and-Feel Observation", "Performance Tip", "Portability Tip",
22 "Software Engineering Observation" ];
23
24 // pick a random image and corresponding description, then modify
25 // the img element in the document's body
26 function pickImage()
27 {
28     var index = Math.floor( Math.random() * 7 );
29     iconImg.setAttribute( "src", pictures[ index ] + ".png" );
30     iconImg.setAttribute( "alt", descriptions[ index ] );
31 } // end function pickImage
32
33 // registers iconImg's click event handler
34 function start()
35 {
36     iconImg = document.getElementById( "iconImg" );
37     iconImg.addEventListener( "click", pickImage, false );
38 } // end function start
39
40 window.addEventListener( "load", start, false );
```

Fig. 10.12 | Random image selection using arrays.

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

43

10.6 References and Reference Parameters



- ▶ Two ways to pass arguments to functions (or methods)
 - pass-by-value
 - pass-by-reference
- ▶ Pass-by-value
 - a *copy* of the argument's value is made and is passed to the called function
- ▶ In JavaScript, **numbers, boolean values and strings** are passed to functions by **value**.

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

44

10.6 References and Reference Parameters



▶ Pass-by-reference

- The caller gives the called function access to the caller's data and allows the called function to *modify* the data if it so chooses
- Can *improve performance* because it can eliminate the overhead of copying large amounts of data, but it can weaken security because the called function can access the caller's data
- All **objects** are passed to functions by **reference**



Error-Prevention Tip 10.3

With pass-by-value, changes to the copy of the value received by the called function do not affect the original variable's value in the calling function. This prevents the accidental side effects that hinder the development of correct and reliable software systems.



Software Engineering Observation 10.3

When information is returned from a function via a **return** statement, numbers and boolean values are returned by value (i.e., a copy is returned), and objects are returned by reference (i.e., a reference to the object is returned). When an object is passed-by-reference, it's not necessary to return the object, because the function operates on the original object in memory.



10.7 Passing Arrays to Functions

- ▶ Pass entire array will be pass-by-reference
- ▶ Pass individual element in an array will be pass-by-value, unless the element is an object
- ▶ See the following examples:

```
4 function myFunc(x) {
5     if (x instanceof Array)
6         x[0] = -1;
7     else
8         x = -1;
9 }
10 var arr = [1,2,3,4,5];
11 myFunc(arr[1]);
12 console.log(arr); //what is the content of Array arr?
13 myFunc(arr);
14 console.log(arr); //what is the content of Array arr?
```


10.7 Passing Arrays to Functions (Cont.)



- ▶ join method of an Array
 - Returns a string that contains all of the elements of an array, separated by the string supplied in the function's argument
 - If an argument is not specified, the empty string is used as the separator



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.13: PassArray.html -->
4 <!-- HTML document that demonstrates passing arrays and -->
5 <!-- individual array elements to functions. -->
6 <html>
7   <head>
8     <meta charset = "utf-8">
9     <title>Arrays as Arguments</title>
10    <link rel = "stylesheet" type = "text/css" href = "style.css">
11    <script src = "PassArray.js"></script>
12  </head>
13  <body>
14    <h2>Effects of passing entire array by reference</h2>
15    <p id = "originalArray"></p>
16    <p id = "modifiedArray"></p>
17    <h2>Effects of passing array element by value</h2>
18    <p id = "originalElement"></p>
19    <p id = "inModifyElement"></p>
20    <p id = "modifiedElement"></p>
21  </body>
22 </html>
```

Fig. 10.13 | HTML document that demonstrates passing arrays and individual array elements to functions. (Part 1 of 2.)

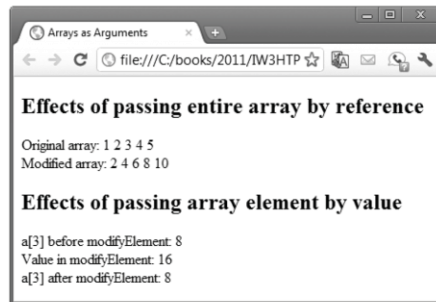


Fig. 10.13 | HTML document that demonstrates passing arrays and individual array elements to functions. (Part 2 of 2.)



Software Engineering Observation 10.4

JavaScript does not check the number of arguments or types of arguments that are passed to a function. It's possible to pass any number of values to a function.





```
1 // Fig. 10.14: PassArray.js
2 // Passing arrays and individual array elements to functions.
3 function start()
4 {
5     var a = [ 1, 2, 3, 4, 5 ];
6
7     // passing entire array
8     outputArray( "Original array: ", a,
9         document.getElementById( "originalArray" ) );
10    modifyArray( a ); // array a passed by reference
11    outputArray( "Modified array: ", a,
12        document.getElementById( "modifiedArray" ) );
13
14    // passing individual array element
15    document.getElementById( "originalElement" ).innerHTML =
16        "a[3] before modifyElement: " + a[ 3 ];
17    modifyElement( a[ 3 ] ); // array element a[3] passed by value
18    document.getElementById( "modifiedElement" ).innerHTML =
19        "a[3] after modifyElement: " + a[ 3 ];
20 } // end function start()
21
```

Fig. 10.14 | Passing arrays and individual array elements to functions. (Part 1 of 2.)



```
22 // outputs heading followed by the contents of "theArray"
23 function outputArray( heading, theArray, output )
24 {
25     output.innerHTML = heading + theArray.join( " " );
26 } // end function outputArray
27
28 // function that modifies the elements of an array
29 function modifyArray( theArray )
30 {
31     for ( var j in theArray )
32     {
33         theArray[ j ] *= 2;
34     } // end for
35 } // end function modifyArray
36
37 // function that modifies the value passed
38 function modifyElement( e )
39 {
40     e *= 2; // scales element e only for the duration of the function
41     document.getElementById( "inModifyElement" ).innerHTML =
42         "Value in modifyElement: " + e;
43 } // end function modifyElement
44
45 window.addEventListener( "load", start, false );
```

Fig. 10.14 | Passing arrays and individual array elements to functions. (Part 2 of 2.)

10.8 Sorting Arrays with Array Method sort



▶ **Sorting data**

- Putting data in a particular order, such as ascending or descending
- One of the most important computing functions

10.8 Sorting Arrays with Array Method sort (Cont.)



▶ **Array object in JavaScript has a built-in method sort**

- With no arguments, the method uses string comparisons to determine the sorting order of the array elements
- Method sort takes as its argument the name of a function that compares its two arguments and returns
 - a negative value if the first argument is less than the second argument,
 - Zero if the arguments are *equal*, or
 - a positive value if the first argument is *greater than* the second



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.15: Sort.html -->
4 <!-- HTML5 document that displays the results of sorting an array. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Array Method sort</title>
9     <link rel = "stylesheet" type = "text/css" href = "style.css">
10    <script src = "Sort.js"></script>
11  </head>
12  <body>
13    <h1>Sorting an Array</h1>
14    <p id = "originalArray"></p>
15    <p id = "sortedArray"></p>
16  </body>
17 </html>
```

Fig. 10.15 | HTML5 document that displays the results of sorting an array. (Part 1 of 2.)

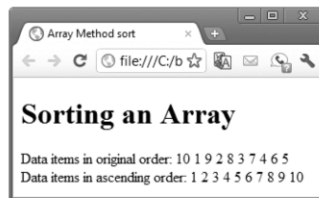


Fig. 10.15 | HTML5 document that displays the results of sorting an array. (Part 2 of 2.)





```
1 // Fig. 10.16: Sort.js
2 // Sorting an array with sort.
3 function start()
4 {
5     var a = [ 10, 1, 9, 2, 8, 3, 7, 4, 6, 5 ];
6
7     outputArray( "Data items in original order: ", a,
8         document.getElementById( "originalArray" ) );
9     a.sort( compareIntegers ); // sort the array
10    outputArray( "Data items in ascending order: ", a,
11        document.getElementById( "sortedArray" ) );
12 } // end function start
13
14 // output the heading followed by the contents of theArray
15 function outputArray( heading, theArray, output )
16 {
17     output.innerHTML = heading + theArray.join( " " );
18 } // end function outputArray
19
```

Fig. 10.16 | Sorting an array with sort. (Part 1 of 2.)



```
20 // comparison function for use with sort
21 function compareIntegers( value1, value2 )
22 {
23     return parseInt( value1 ) - parseInt( value2 );
24 } // end function compareIntegers
25
26 window.addEventListener( "load", start, false );
```

Fig. 10.16 | Sorting an array with sort. (Part 2 of 2.)





Software Engineering Observation 10.5

Functions in JavaScript are considered to be data. Therefore, functions can be assigned to variables, stored in arrays and passed to functions just like other data types.

10.9 Searching Arrays with Array Method indexOf



- ▶ It's often necessary to determine whether an array contains a value that matches a certain *key value*.
- ▶ The process of locating a particular element value in an array is called *searching*.
- ▶ The Array object in JavaScript has built-in methods `indexOf` and `lastIndexOf` for searching arrays.
 - Method `indexOf` searches for the first occurrence of the specified key value
 - Method `lastIndexOf` searches for the last occurrence of the specified key value.
- ▶ If the key value is found in the array, each method returns the index of that value; otherwise, `-1` is returned.

10.9 Searching Arrays with Array Method indexOf (Cont.)



- ▶ Every input element has a **value** property that can be used to get or set the element's value.

Optional Second Argument to indexOf and lastIndexOf

- ▶ You can pass an optional second argument to methods `indexOf` and `lastIndexOf` that represents the index from which to start the search.
- ▶ By default, this argument's value is 0 and the methods search the entire array.
- ▶ If the argument is greater than or equal to the array's length, the methods simply return -1.
- ▶ If the argument's value is negative, it's used as an offset from the end of the array.

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

63



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.17: search.html -->
4 <!-- HTML5 document for searching an array with indexOf. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Search an Array</title>
9     <script src = "search.js"></script>
10  </head>
11  <body>
12    <form action = "#">
13      <p><label>Enter integer search key:
14        <input id = "inputVal" type = "number"></label>
15        <input id = "searchButton" type = "button" value = "Search">
16      </p>
17      <p id = "result"></p>
18    </form>
19  </body>
20 </html>
```

Fig. 10.17 | HTML5 document for searching an array with `indexOf`.
(Part I of 2.)

©1992-2012 by Pearson Education, Inc. All Rights Reserved.

64

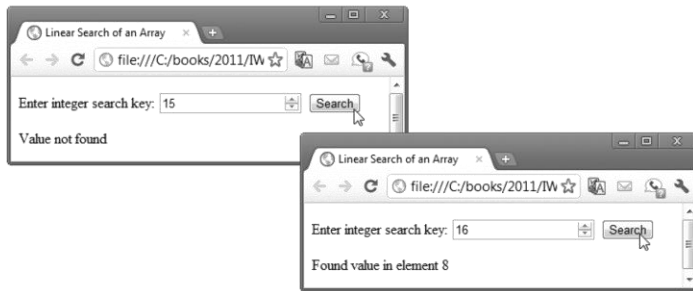


Fig. 10.17 | HTML5 document for searching an array with indexOf.
(Part 2 of 2.)



```

1 // Fig. 10.18: search.js
2 // Search an array with indexOf.
3 var a = new Array( 100 ); // create an array
4
5 // fill array with even integer values from 0 to 198
6 for ( var i = 0; i < a.length; ++i )
7 {
8     a[ i ] = 2 * i;
9 } // end for
10
11 // function called when "Search" button is pressed
12 function buttonPressed()
13 {
14     // get the input text field
15     var inputVal = document.getElementById( "inputVal" );
16
17     // get the result paragraph
18     var result = document.getElementById( "result" );
19
20     // get the search key from the input text field then perform the search
21     var searchKey = parseInt( inputVal.value );
22     var element = a.indexOf( searchKey );
23

```

Fig. 10.18 | Search an array with indexOf.





```
24     if ( element != -1 )
25     {
26         result.innerHTML = "Found value in element " + element;
27     } // end if
28     else
29     {
30         result.innerHTML = "Value not found";
31     } // end else
32 } // end function buttonPressed
33
34 // register searchButton's click event handler
35 function start()
36 {
37     var searchButton = document.getElementById( "searchButton" );
38     searchButton.addEventListener( "click", buttonPressed, false );
39 } // end function start
40
41 window.addEventListener( "load", start, false );
```

Fig. 10.18 | Search an array with indexOf.



10.10 Multidimensional Arrays

- ▶ To identify a particular two-dimensional multidimensional array element
 - Specify the two indices
 - By convention, the first identifies the element's row, and the second identifies the element's column
- ▶ In general, an array with m rows and n columns is called an m -by- n array
- ▶ Two-dimensional array element accessed using an element name of the form `a[row][column]`
 - `a` is the name of the array
 - `row` and `column` are the indices that uniquely identify the row and column



	Column 0	Column 1	Column 2	Column 3
Row 0	a[0][0]	a[0][1]	a[0][2]	a[0][3]
Row 1	a[1][0]	a[1][1]	a[1][2]	a[1][3]
Row 2	a[2][0]	a[2][1]	a[2][2]	a[2][3]

Diagram illustrating a two-dimensional array with three rows and four columns. The array is shown as a grid of elements. The first row is labeled 'Row 0', the second 'Row 1', and the third 'Row 2'. The columns are labeled 'Column 0', 'Column 1', 'Column 2', and 'Column 3'. Each element is represented as a sub-array, e.g., 'a[0][0]'. Arrows point from the labels 'Column subscript', 'Row subscript', and 'Array name' to the corresponding parts of the element 'a[2][1]' in the third row, second column.

Fig. 10.19 | Two-dimensional array with three rows and four columns.



©1992-2012 by Pearson Education, Inc. All Rights Reserved.

69



10.10 Multidimensional Arrays (Cont.)

- ▶ Multidimensional arrays can be initialized in declarations like a one-dimensional array, with values grouped by row in square brackets
 - The interpreter determines the number of rows by counting the number of sub initializer
 - The interpreter determines the number of columns in each row by counting the number of values in the sub-array that initializes the row
- ▶ The rows of a two-dimensional array can vary in length
- ▶ A multidimensional array in which each row has a different number of columns can be allocated dynamically with operator new



©1992-2012 by Pearson Education, Inc. All Rights Reserved.

70



```
1 <!DOCTYPE html>
2
3 <!-- Fig. 10.20: InitArray3.html -->
4 <!-- HTML5 document showing multidimensional array initialization. -->
5 <html>
6   <head>
7     <meta charset = "utf-8">
8     <title>Multidimensional Arrays</title>
9     <link rel = "stylesheet" type = "text/css" href = "style.css">
10    <script src = "InitArray3.js"></script>
11  </head>
12  <body>
13    <h2>Values in array1 by row</h2>
14    <div id = "output1"></div>
15    <h2>Values in array2 by row</h2>
16    <div id = "output2"></div>
17  </body>
18 </html>
```

Fig. 10.20 | HTML5 document showing multidimensional array initialization. (Part 1 of 2.)

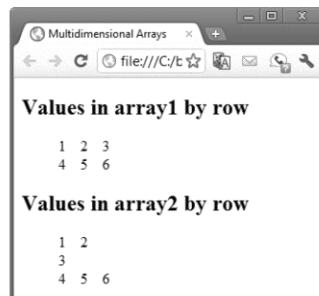


Fig. 10.20 | HTML5 document showing multidimensional array initialization. (Part 2 of 2.)





```
1 // Fig. 10.21: InitArray3.js
2 // Initializing multidimensional arrays.
3 function start()
4 {
5     var array1 = [ [ 1, 2, 3 ], // row 0
6                   [ 4, 5, 6 ] ]; // row 1
7     var array2 = [ [ 1, 2 ], // row 0
8                   [ 3 ], // row 1
9                   [ 4, 5, 6 ] ]; // row 2
10
11     outputArray( "Values in array1 by row", array1,
12                 document.getElementById( "output1" ) );
13     outputArray( "Values in array2 by row", array2,
14                 document.getElementById( "output2" ) );
15 } // end function start
16
```

Fig. 10.21 | Initializing multidimensional arrays. (Part 1 of 2.)



```
17 // display array contents
18 function outputArray( heading, theArray, output )
19 {
20     var results = "";
21
22     // iterates through the set of one-dimensional arrays
23     for ( var row in theArray )
24     {
25         results += "<ol>"; // start ordered list
26
27         // iterates through the elements of each one-dimensional array
28         for ( var column in theArray[ row ] )
29         {
30             results += "<li>" + theArray[ row ][ column ] + "</li>";
31         } // end inner for
32
33         results += "</ol>"; // end ordered list
34     } // end outer for
35
36     output.innerHTML = results;
37 } // end function outputArray
38
39 window.addEventListener( "load", start, false );
```

Fig. 10.21 | Initializing multidimensional arrays. (Part 2 of 2.)

